



70 - 120 HP

Body in **HARDOX**

Height of the case from the ground 460

Altezza cassone da terra 460

Low transmission with
4 XPB belts (patented system)

*Trasmissione ribassata con 4
cinghie XPB (sistema brevettato)*

Front connection cat. 1 - 2

Attacco frontale cat. 1 - 2

Reduced width
transmission (90 mm)
to reduce space requirement
with HTD toothed belt

*Trasmissione a larghezza
ridotta (90 mm) per ridurre
l'ingombro con cinghia
dentata HTD*

Support roller with
profiled roller scraper

*Rullo appoggio con
raschiarullo in profilato*

Reversible connection
with double freewheel

*Attacco reversibile
con doppia ruota libera*

Rear connection cat. 1

Attacco posteriore cat. 1

Hydraulic shifting on chromed stems



Spostamento idraulico su steli cromati

Fixed counter-knife

Controcoltello fisso

Adjustable counter-knife
(fixed with bolts)

*Controcoltello imbullonato
regolabile*

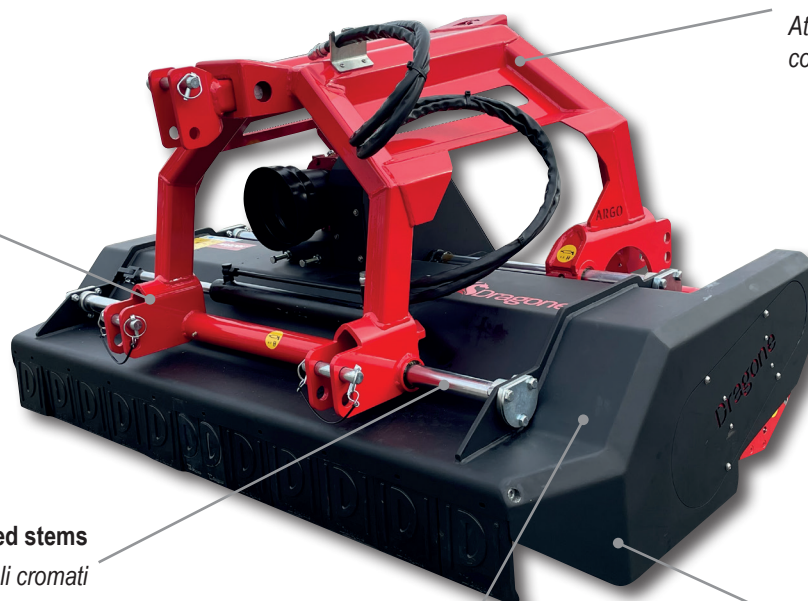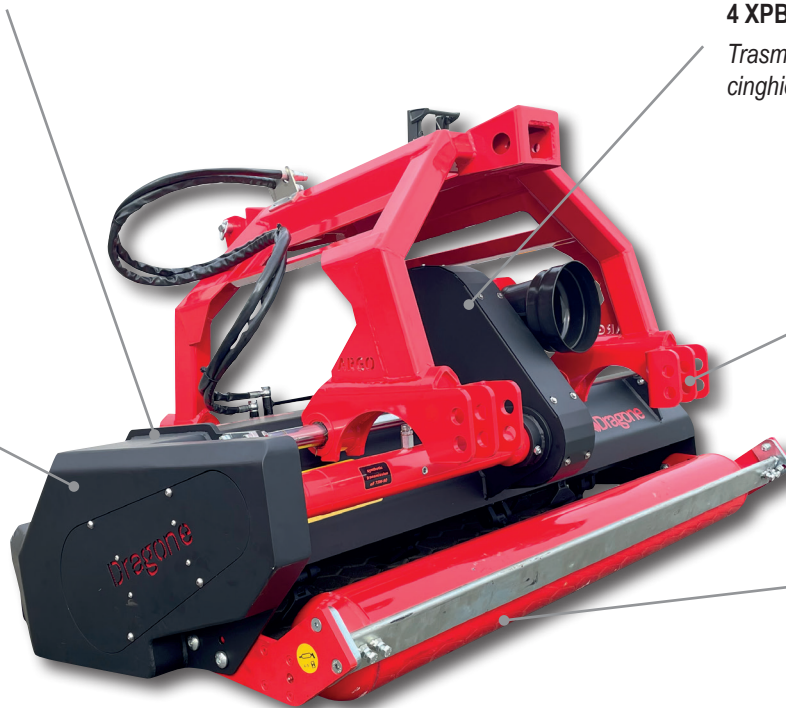

Technical data <i>Dati tecnici</i>	140	150	160	175	190	210	220
Overall width <i>Totale ingombro</i>	58,66 " - 1490 mm	62,60 " - 1590 mm	66,54 " - 1690 mm	72,83 " - 1850 mm	78,35 " - 1990 mm	86,22 " - 2190 mm	90,16 " - 2290 mm
Cutting width <i>Totale taglio</i>	55,11 " - 1400 mm	59,06 " - 1500 mm	62,99 " - 1600 mm	68,90 " - 1750 mm	74,80 " - 1900 mm	82,68 " - 2100 mm	86,61 " - 2200 mm
Cutting capacity <i>Capacità taglio</i>	2,76/3,15 " - 7/8 cm						
Case height from the ground <i>Altezza cassone da terra</i>	18,11 " - 460 mm						
Belt <i>Cinghie</i>	5						
Hp <i>Hp</i>	40 - 80	45 - 65	45 - 70	50 - 80	60 - 80	65 - 85	70 - 90
Weight <i>Peso</i>	1433 lbs - 650 Kg	1521 lbs - 690 Kg	1598 lbs - 725 Kg	1631 lbs - 740 Kg	1720 lbs - 780 Kg	1808 lbs - 820 Kg	1852 lbs - 840 Kg
Structural steel <i>Materiale cassone</i>	HARDOX						

Standard features <i>Caratteristiche di serie</i>	140	150	160	175	190	210	220
Rotor tube Ø <i>Tubo rotore</i> Ø	7,63 " - 194 mm						
Cutting diameter Ø <i>Taglio</i> Ø	17,87 " - 454 mm						
Rotor shaft Ø <i>Stelo rotore</i> Ø	2,36 " - 60 mm						
Case thickness <i>Spessore cassa</i>	0,20 " - 5 mm						
Flank thickenss <i>Spessore fiancali</i>	0,25 " - 6 mm						
Cutting hammer <i>Martelli</i>	12	14	16	18	20		


	RM 169
Cutting tools <i>Utensili di taglio</i>	 standard



Technical data are indicative, Dragone S.R.L. reserves the right to modify them without notice
 I dati tecnici sono puramente indicativi, la ditta Dragone S.R.L. si riserva il diritto di modificarli senza preavviso



DRAGONE s.r.l.
 Via G. Abbate, 189 - 14054 Castagnole delle Lanze (AT) - Italy
 Tel. +39 0141 878582 - info@dragoneweb.com
 www.dragoneweb.com

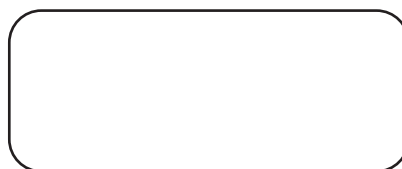

Copyright DRAGONE 2024