

The following installation steps are only applicable for mounting the light onto a 4-inch round light pole

The LFXU-UPG grabber consists of a mounting base and a fastening bracket

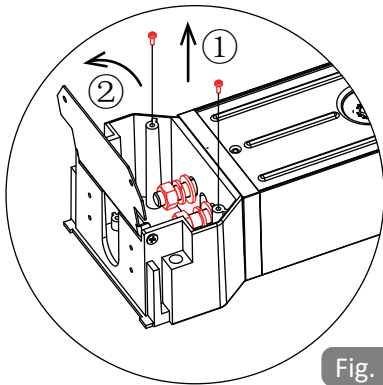


Fig. 1

**Step 1:** Please remove the two M4×10 pan head Phillips screws on the wiring cover and open it. Then, secure the mounting base to the bottom of the LFXU fixture in the order of Flat washer → Spring washer → Nut (included in the LFXU light fixture's accessory pack). See fig.1

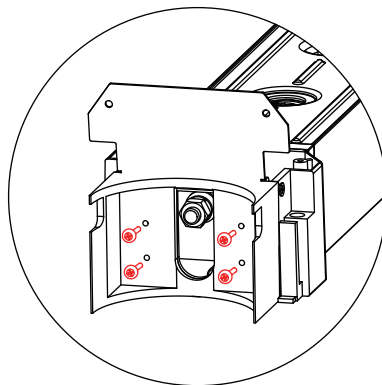


Fig. 2

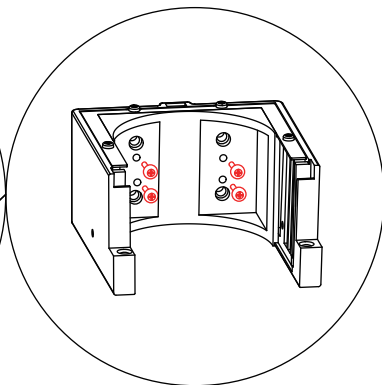


Fig. 3

**Step 2:** Take eight M4×10 pan head Phillips screws from the round pole screw kit, and use them to secure the rubber pads (included in the box) onto the grabber. See fig.2 & 3

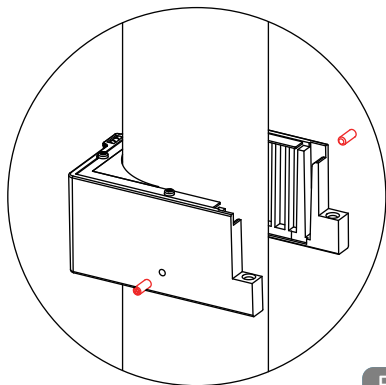


Fig. 4

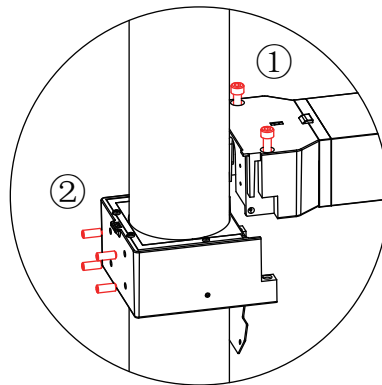


Fig. 5

o . u . U . . . . . fastening bracket .  
 . . . . . u . V . o .

o . u . U . . . . . the .  
 mounting base and fastening bracket .  
 u . . . . . U . . . . .

fastening bracket

See fig.5

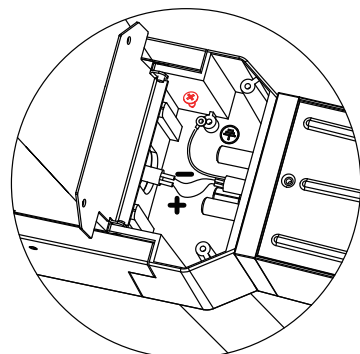


Fig.6

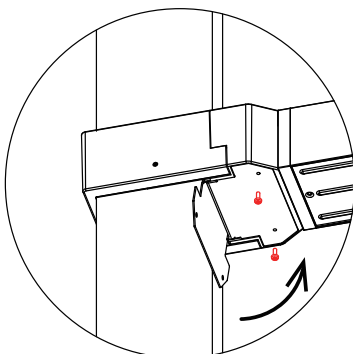


Fig.7

**Step 5:** Please connect the wires according to the wiring diagram in the installation manual of the LFXU light fixture. After completing the wiring, please close the wiring cover. Then take two M4×10 pan head Phillips screws from the universal screw kit and fasten the wiring cover securely. See fig. 6 & 7



The following installation steps are only applicable for mounting the light onto a **4-inch Square light pole**

The LFXU-UPG grabber consists of a mounting base and a fastening bracket

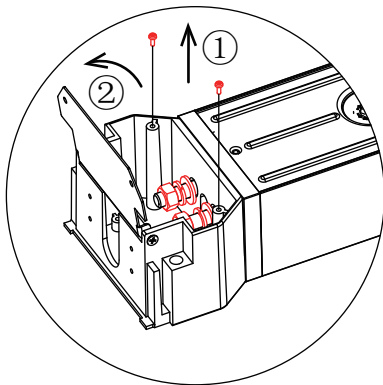


Fig. 1

**Step 1:** Please remove the two M4×10 pan head Phillips screws on the wiring cover and open it. Then, secure the mounting base to the bottom of the LFXU fixture in the order of Flat washer → Spring washer → Nut (included in the LFXU light fixture's accessory pack). See fig.1

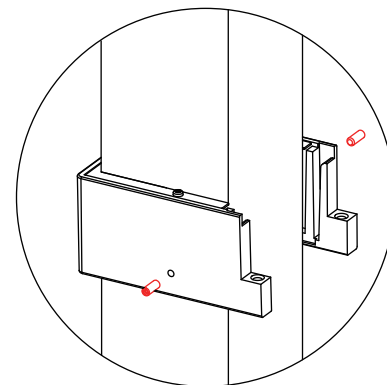


Fig. 2

**Step 2:** Take two M6×16 set screws from the universal screw kit and secure the fastening bracket onto the square pole (Torque: 10 N·m). See fig.2

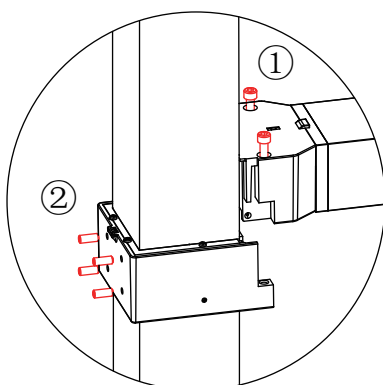


Fig. 3

**Step 3:** Take two M8×55 hex socket head cap screws from the universal screw kit and tighten the mounting base and fastening bracket. Then, take four M8×16 set screws from the square pole screw kit to secure the fastening bracket onto the square pole. See fig.3

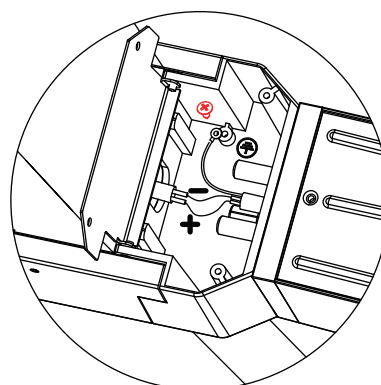


Fig. 4

**Step 4:** Please connect the wires according to the wiring diagram in the installation manual of the LFXU light fixture.

After completing the wiring, close the wiring cover. Then take two M4×10 pan head Phillips screws from the universal screw kit and fasten the wiring cover securely. See fig. 4 & 5

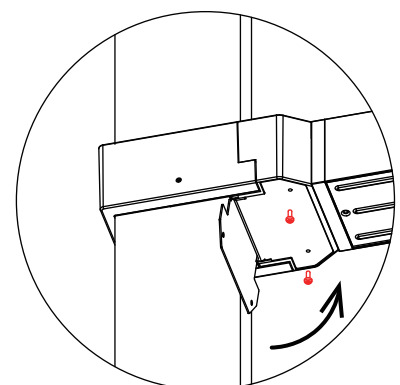


Fig. 5

