

# CXER SERIES OUTDOOR LIGHTING

**CXER-30-50W-MCTP-SR-EM**  
ROUND NEW CONCEPT GARAGE AND CEILING LIGHTS  
WITH SENSOR & EMERGENCY BACK UP BATTERY  
**MCTP** Multi Color Temperature & Multi Power/Wattage (Selectable)




Customer Name: \_\_\_\_\_

Project Name: \_\_\_\_\_

Note: \_\_\_\_\_

Type: \_\_\_\_\_

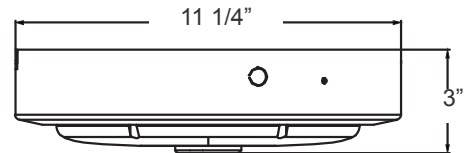

11 1/4" (W) X 3"(H)

Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

## Features

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights
- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

## Technical Specifications

### Electrical:

- Wattage: 30W/40W/50W
- Input Current: 0.6A MAX
- Input Voltage: 120-277VAC 50/60Hz
- Power Factor: >0.90
- LPW: 135LPW

### Mechanical:

- Stamped Galvanized Steel
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

### Emergency Battery Backup Spec:

- Output Power: 8W
- Output Voltage: 48V
- Li-Ion Battery / >90 Minutes Emergency Operation
- Test Button Installed on The Side of The Fixture

### Lighting:

- MCTP: Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 6750LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°
- Lifespan: 70000 Hrs

### Applications:



- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

### Other Models:


- 80W | 10800LM | CXER-40-80W-MCTP-SR-EM-WH



## Photometrics: CXER-30-50W-MCTP-SR-EM

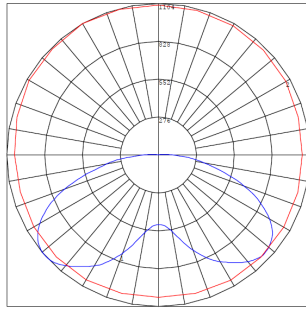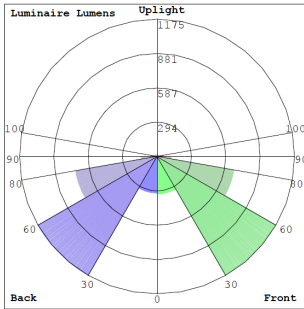

BUD Rating: B2-U3-G2

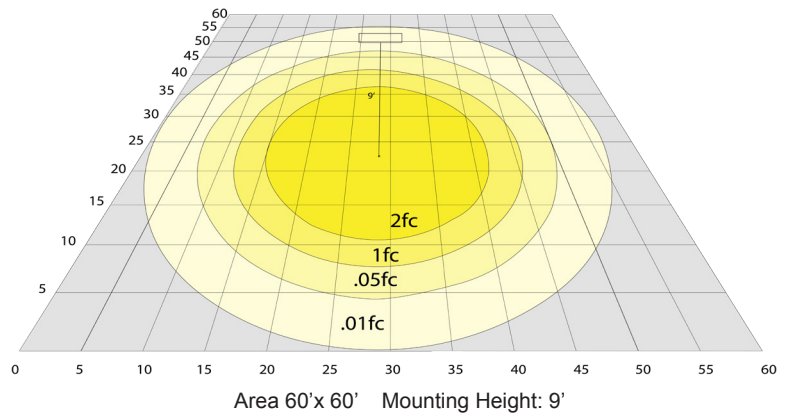

## Other Views:



Side View



Front View



Switch View

## Performance Table: CXER-30-50W-MCTP-SR-EM

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
CXER-30-50W-MCTP-SR-EM	30W	120~277V	4050LM	3000K	B2-U3-G2	135
	40W		5400LM	4000K		
	50W		6750LM	5000K		

## Sample Ordering

Model	Min.	Max.Wattage	Color Temp.	Sensor	Battery
CXER	30	50W	MCTP	SR	EM

### Accessory:

Blank = No Option For Accessories  
**WEC-3PR-72-TLB-BK** = 600W Max, ZHAGA 12-24VDC PIR SENSOR, WITH BASE (OPTIONAL REMOTE CONTROL WEC-3RC)

### Accessory:



WEC-3PR-72-TLB-BK

