
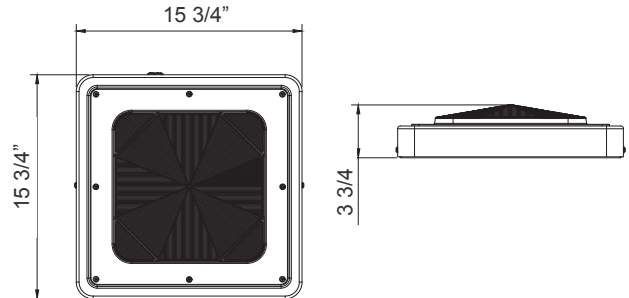


CXES SERIES OUTDOOR LIGHTING

CXES-40-80W-MCTP-EM
SQUARE NEW CONCEPT GARAGE AND CEILING LIGHTS
EMERGENCY BACK UP BATTERY
MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

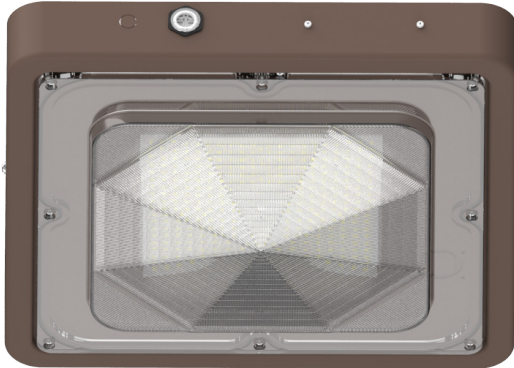

15 3/4" (L) X 15 3/4" (W) X 3 3/4" (H)

Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting.

Features

- Stamped Galvanized Steel With Prismatic Polycarbonate Lens Redesigned For LED
- Designed for 9 to 16 Foot Mounting Heights
- Factory-Installed Options: Battery Backup, Motion Sensor
- 7-year Warranty

Technical Specifications

Electrical:

- Wattage: 40W/60W/80W
- Input Current: 0.6A MAX
- Input Voltage: 120-277VAC 50/60Hz
- Power Factor: >0.90
- LPW: 130LPW

Mechanical:

- Stamped Galvanized Steel
- Four 1/2" Threaded Hubs Located On Four Sides Of The Housing
- Prismatic Polycarbonate Lens
- Lifespan: 70000 Hrs
- Operating Temperature: -40°F ~ 104°F
- Suitable For Damp Locations
- 7-year Warranty

Emergency Battery Backup Spec:

- Output Power: 8W
- Output Voltage: 48V
- Li-Ion Battery / >90 Minutes Emergency Operation
- Test Button Installed on The Side of The Fixture

Lighting:

- MCTP: Multi-CCT and Power Switch Is In The Fixture
- Dimming: 0~10V Dimmable
- LED Type/ Brand: LUMILEDS 2835LED
- Total Lumens: 10400LM Max.
- Color Temperature: 3000K/4000K/5000K
- Color Rendering index: >70
- Beam Angle: 150°
- Lifespan: 70000 Hrs

Applications:




- Indoor Parking
- Commercial Buildings
- School
- Warehouses
- Complexes
- Apartment
- Garage

Other Models:

- 30W | 3900LM | CXES-10-30W-MCTP-EM
- 60W | 7800LM | CXES-30-60W-MCTP-EM




Photometrics: CXES-40-80W-MCTP-EM

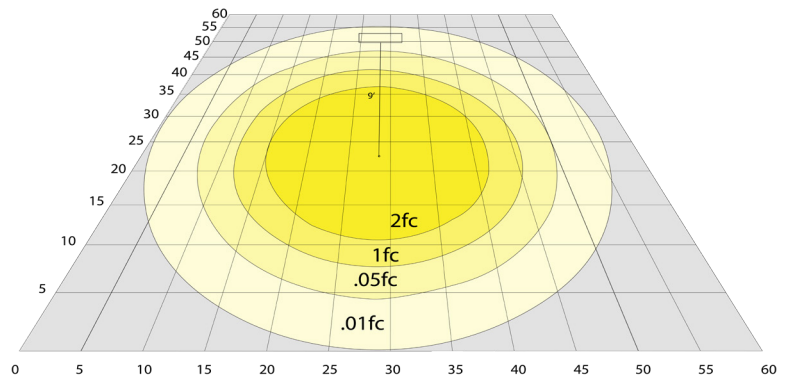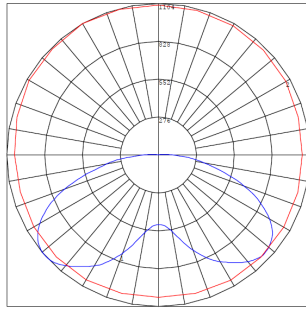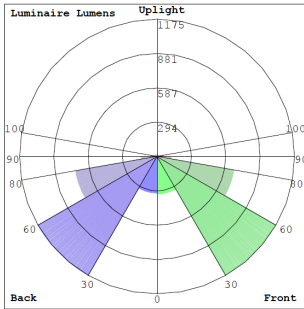


BUD Rating: B2-U3-G2

Area 60'x 60' Mounting Height: 9'

Other Views:

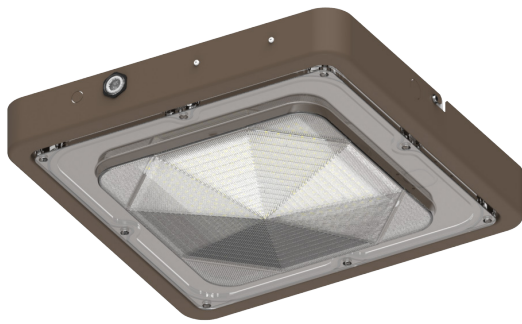

Side View

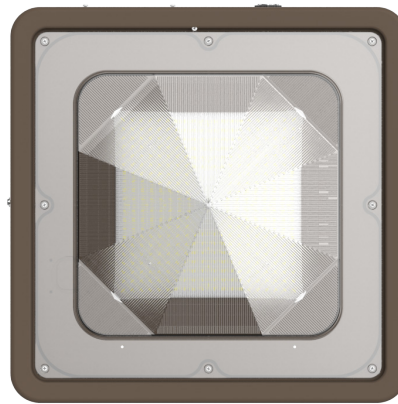

Front View



Switch View

Performance Table: CXES-40-80W-MCTP-EM

| MODEL NO. | Wattage | Voltage | Lumens | Color Temp. | BUG Rating | LPW |
|---------------------|---------|----------|---------|-------------|------------|-----|
| CXES-40-80W-MCTP-EM | 40W | 120~277V | 5200LM | 3000K | B2-U3-G2 | 130 |
| | 60W | | 7850LM | 4000K | | |
| | 80W | | 10400LM | 5000K | | |

Sample Ordering

Model **Min.** **Max.Wattage** **Color Temp.** **Battery**

CXES - 40 - 80W - MCTP - EM

