

LLHC SERIES Industrial Lighting

LLHC-165-220W-MCTP
ADJUSTABLE COMPACT LINEAR HIGHBAY

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

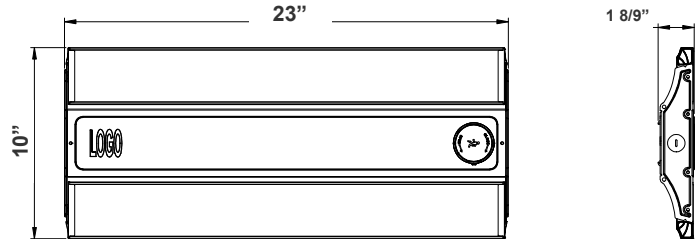

10"(H) X 23"(W) X 1 8/9"(D)

Ideal for replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing warehousing and other large indoor spaces with mounting heights from 10ft. to 40ft. the fixture can be surface mounted also.

Features

- High quality LED Chips to Provide High Efficiency, Heat Dissipation
- Stability, and Lumen Maintenance
- Multi CCT and Power: The Switch Is In The Driver
- Polycarbonate Lens, High Flame Retardant Point.

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 165W/190W/220W
- Power factor: >0.95
- Efficacy: 150LM/W

Mechanical:

- Steel Housing
- Adjustable Lenses. 45° Max.
- V-hooks & Two 30" Hanging Chains Incl.
- Operating Temperature: -4°F ~ 131°F
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power: The Switch Is On The Driver
- Lens: Polycarbonate Lens
- Total Lumens: 33000LM Max.
- Color Temperatures: 3000K/3500K/4000K/5000K
- Color Rendering index: >80
- 50,000 Hours Rated Life

Applications:

- Warehouse
- Manufacturing Plants Distribution Centers
- Industrial Commercial
- Grocery Stores Gymnasiums

Other Models:



- 150W | 22500LM | LLHC-80-150W-MCTP




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: LLHC-165-220W-MCTP



BUG Rating: B4-U3-G3

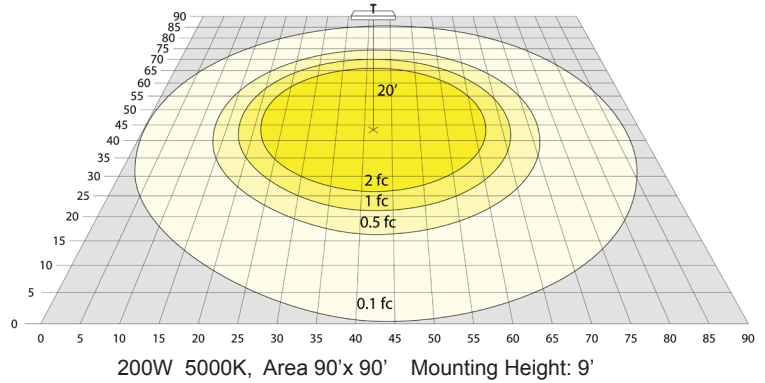

200W 5000K, Area 90'x 90' Mounting Height: 9'

Other Views:



Switch View



Side View



Back View

Performance Table: LLHC-165-220W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLHC-165-220W-MCTP	165W	120~277V	24750LM	3000K	B4-U3-G3	150
	190W		25650LM	3500K		
	220W		33000LM	4000K		

Sample Ordering

Model	Wattage	Wattage	Color Temp.
LLHC	-	165W	-
	-	220W	-
	-	MCTP	

Accessory Options

SCL-GSY10 = Heavy-Duty Adjustable 10ft. 1/16" Suspension Kit With Y-Connector & Loop Gripper & Hooks

SCL-GSY20 = Heavy-Duty Adjustable 20ft. 1/16" Suspension Kit With Y-Connector & Loop Gripper & Hooks

Factory-Installed Options

Blank = No Option

OPT-EM-OD1INT = Emergency Battery Backup

OPT-SEN-3MR-3-WH = Microwave BI-Level Sensor

OPT-EM-HB4EXT = External Emergency Battery Backup

OPT-FWH-63 = 6FT 3-Wire Whip

OPT-FWH-65 = 6FT 5-Wire Whip

OPT-FWH-66 = 6FT 6-Wire Whip

OPT-HBC-125TL-WH = 8FT, 15A, 125V, WHITE

OPT-HBC-277TL-WH = 8FT, 15A, 277V, WHITE

OPT-HBC-125SB-WH = 10FT, 15A, 125V, 18/3STR, WHT

Example:

1. LLHC-165-220W-MCTP (For LLHC-165-220W-MCTP fixture 120V-277V)
2. LLHC-165-220W-MCTP (For LLHC-165-220W-MCTP fixture 120V-277V)
- OPT-SEN-3MR-3-WH (For Factory-Installed Sensor)

OPTIONAL ACCESSORIES



SCL-GSY10
SCL-GSY20

EMERGENCY BATTERY BACKUP AND SENSOR OPTIONS



OPT-EM-OD1INT



OPT-SEN-3MR-3-WH

