

LLHC SERIES Industrial Lighting

LLHC-80-150W-MCTP-SR

BUILDER SERIES POWER & CCT- ADJUSTABLE COMPACT LINEAR HIGHBAYM

MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)



Ideal for replacement of conventional lighting systems such as HID and fluorescent. Applications include manufacturing warehousing and other large indoor spaces with mounting heights from 10ft. to 40ft. the fixture can be surface mounted also.

WESTGATE


THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____

Type: _____

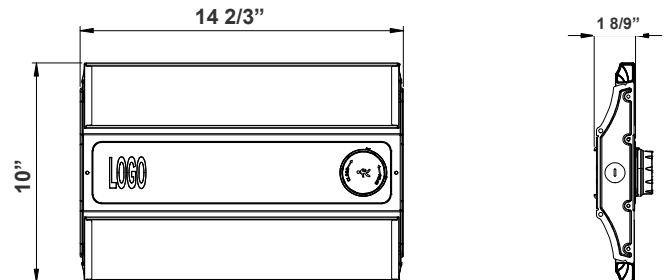

10"(H) X 14 2/3"(W) X 1 8/9"(D)

Features

- High quality LED Chips to Provide High Efficiency, Heat Dissipation
- Stability, and Lumen Maintenance
- Multi CCT and Power: The Switch Is In The Driver
- Polycarbonate Lens, High Flame Retardant Point.

Technical Specifications

Electrical:

- Voltage: 120~277V AC/50~60 Hz
- Wattage: 80W/10W/150W
- Power Factor: >0.95
- Efficacy: 150LM/W

Mechanical:

- Steel Housing
- Adjustable Lenses. 45° Max.
- Twist-Lock Zhaga Socket Pre-Installed. See Motion Sensor Accessories
- V-hooks & Two 30" Hanging Chains Incl.
- Operating Temperature: -4°F ~ 131°F
- Suitable for Damp Locations
- 5-Year Warranty

Lighting:

- Dimming: 0~10V Dimmable
- Multi CCT and Power: The Switch is on the driver
- Lens: Polycarbonate Lens
- Total Lumens: 22500LM Max.
- Color Temperatures: 3000K/3500K/4000K/5000K
- Color Rendering index: >80
- 50,000 Hours Rated Life

Applications:

- Warehouse
- Manufacturing Plants Distribution Centers
- Industrial Commercial
- Grocery Stores Gymnasiums

Other Models:



- 220W | 29700LM | LLHC-165-220W-MCTP-SR




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: LLHC-80-150W-MCTP-SR



BUG Rating: B5-U3-G4

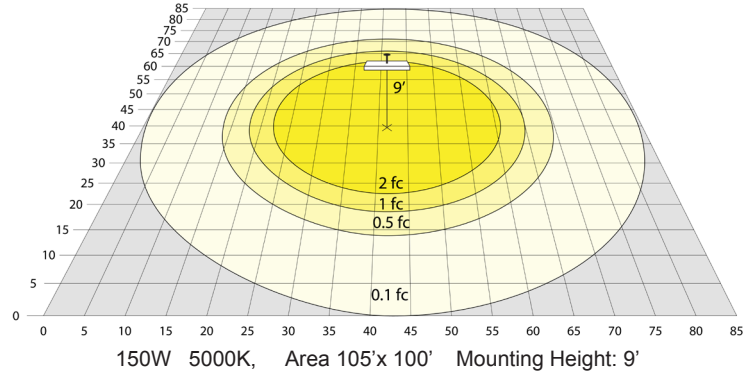

Other Views:



Actual View



Side View



Back View

Performance Table: LLHC-80-150W-MCTP-SR

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LLHC-80-150W- MCTP-SR	80W 110W 150W	120~277V	12000LM 16500LM 22500LM	3000K 3500K 4000K 5000K	B5-U3-G4	150

Sample Ordering

Model	Wattage		Wattage	Color Temp.		Sensor
LLHC	-	80W	-	150W	-	MCTP - SR

Accessory Options

- SCL-GSY10 = Heavy-Duty Adjustable 10ft. 1/16" Suspension Kit With Y-Connector & Loop Gripper & Hooks
- SCL-GSY20 = Heavy-Duty Adjustable 20ft. 1/16" Suspension Kit With Y-Connector & Loop Gripper & Hooks
- WEC-3PR-72-TLB-WH = Sensor-Ready Plug & Play
- WEC-3MR-72-TLB-BK = Sensor-Ready Plug & Play
- WEC-3MBT-72-TLB-BK = Sensor-Ready Plug & Play
- WEC-3RC = Remote Control
- LLHC-WG1 = LHC Wireguard for 150W

Factory-Installed Options

- Blank = No Option
- OPT-EM-LLHC = Emergency Battery Backup
- OPT-SEN-3MR-3-WH = Microwave Bi-Level Sensor
- OPT-EM-HB4EXT = External Emergency Battery Backup
- OPT-FWH-63 = 6FT 3-Wire Whip
- OPT-FWH-65 = 6FT 5-Wire Whip
- OPT-FWH-66 = 6FT 6-Wire Whip
- OPT-HBC-125TL-WH = 8FT, 15A, 125V, WHITE
- OPT-HBC-277TL-WH = 8FT, 15A, 277V, WHITE
- OPT-HBC-125SB-WH = 10FT, 15A, 125V, 18/3STR, WHT

OPTIONAL ACCESSORIES



SCL-GSY10
SCL-GSY20




WEC-3PR-72-TLB-WH



WEC-3MR-72-TLB-BK
WEC-3MBT-72-TLB-BK



WEC-3RC



LLHC-WG1

EMERGENCY BATTERY BACKUP AND SENSOR OPTIONS



OPT-EM-LLHC



OPT-SEN-3MR-3-WH

