LSN SERIES Commercial Lighting

LSN-2FT-20W-MCT-D-EM-SEN 2FT NARROW STRIP WITH SENSOR



LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.

Ideal choice for residential, commercial, and industrial lighting. Steady performance and long lifetime. Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below

eatures

- High Lumen Efficiency
- Ceiling Mount or Suspended Mount
- The Sensor Can Be Overridden (Disconnected)

Technical Specifications

Electrical:

- Voltage: 120-277VAC 60Hz
- Wattage: 20W
- Power Factor: >0.99
- Efficacy: 130 LPW

Mechanical:

- Whit Finish .
- Bi-Level Microwave Motion Sensor Inside the Fixture Under The Lens.
- Lens: Polycarbonate Frosted Lens, Shatter Resistant
- Translucent Lens Caps Illuminate With The Light.
- Integrated Lens & LED Module for Easy Installation & Maintenance.
- Ceiling Mount or Suspended Mount
- Junction Box Cover Kit Included, It Sits on Any 3" or 4" **Round Junction Boxes**
- Operating Temperature: -4°F -122°F
- Housing: Cold-rolled Steel
- Lens: Polycarbonate Frosted Lens
- IP20, Indoor Use Only
- 5-Year Warranty

Sensor Spec:

- Detection Range: 17Ft. / 360°
- Mounting Height: 25Ft. Max.
- **DIP Settings switch on The Sensor**
- **Optional Remote Control (WEC-3RC)**


Other Models:

20W | 2600LM | LSN-2FT-20W-MCT-D-SEN




Customer Name: Project Name:

Note:



Type:

STGA



- Linkable (Optional Alignment Bracket Available)
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Emergency Battery Backup Spec:

- Output Power: 9W
- Output Voltage: 48V
- Li-Ion Battery / >90 Minutes Emergency Operation
- Test Button Installed on The Side of The Fixture


Lighting:

- Dimmable: 0~10V Dimming
- Total Lumens: 2600LM
- Color Temperatures: 3500K/ 4000K/ 5000K
- Multi-CCT (Selectable switch inside fixture)
- Color Rendering Index: CRI ≥ 80
- Reduces Energy Consumption Up to 80% Compared • to a Fluorescent Fixture
- Rated life: 50,000 Hrs

Applications:

- LED Strip Light is a cost-effective, energy-efficient lighting fixture for surface mount applications such as corridors, stairwells, public rooms, schools, hospitals utility areas, etc.
- Ideal for applications requiring fixtures with motion sensor or battery backup, see factory-installed options below
- Ideal for residential, commercial, and industrial lighting. Steady performance and long lifetime



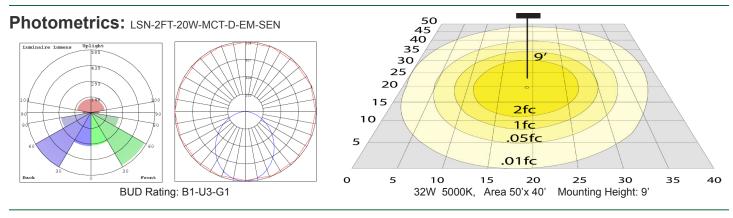

Other Views:



Performance Table: LSN-2FT-20W-MCT-D-EM-SEN

Performance Table: LSN-2F1	1-20W-MC1-D-E	M-SEN				
MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LSN-2FT-20W-MCT-D-EM-SEN	20W	120~277V	2600LM	3500K 4000K 5000K	B1-U3-G1	130
Sample Ordering				ACCESSORIES:		
ModelSizeWattageColor Temp. DimmingEmergencySensorLSN=2FT=20W=MCT=D=EM=SEN						
Accessories:						
				SCL-GSY110 SCL-GSY120 SCL-TBC-WN		
Blank = No Option For Accessories LSN-CB = LSN SERIES ALIGNMENT BRACKET SCL-CSY = ADJUSTABLE 1/16" 6FT. SUSPENSION HOLE ON TOP. WING NUT AND WASHER INCL. SCL-CSY = ADJUSTABLE 1/16" 6FT. SUSPENSION KIT WITH Y-CONNECTOR KEY HOLE SET + 2 T-BAR CLIPS + 1 CABLE BUSHING + 3 PLASTIC TIE STRAPS - 70 LBS. MAX LOAD SCL-GSY10 = HEAVY-DUTY ADJUSTABLE 1/16" 10FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY20 = HEAVY-DUTY ADJUSTABLE 1/16" 20FT. SUSPENSION KIT WITH Y-CONNECTOR & LOOP GRIPPER & HOOKS - 70 LBS. MAX LOAD (2 PER SET) SCL-GSY10 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) SCL-GSY120 = ADJ. 20FT 1/16in SINGLE SUSPENSION CABLE WITH Y HOOK ENDS. LOOP GRIPPER ON TOP 70 LBS. MAX LOAD (ORDER 3 FOR 8FT.) LSN-2FT-WG = WIRE GUARD KIT FOR 2FT LSN STRIP LIGHT				ALIGNMENT (COUPLING) BRACKET SCL-CSY SCL-GSY10 SCL-GSY20		
Blank = No Option For Accessories OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG				LSN-2FT-WG		
				OPT-HBC-125SB-WH OF		

WESTGATE

