

LTRW SERIES Commercial Lighting

LTRW-2X4-MCTP4
ARCHITECTURAL ADVANCED EDGE-LIT WING DESIGN TROFFER


MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____

Project Name: _____

Note: _____ Type: _____
47 1/2"

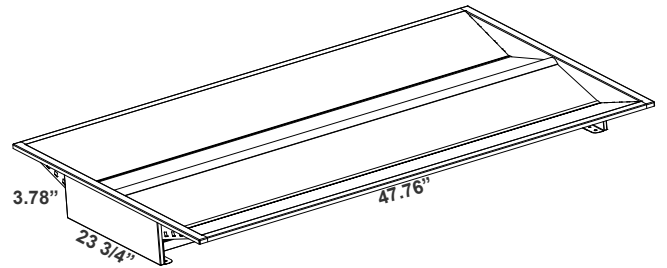

47.76"(W) x 23.75"(H) x 3.78"(D)

This modern, energy-efficient troffer is designed with a sloped lens for enhanced light distribution, offering flexibility with selectable wattage and color temperature (CCT). Ideal for commercial and architectural spaces, it provides seamless integration with varied design aesthetics while delivering superior illumination performance. Featuring adjustable power settings, this troffer maximizes energy savings without compromising lighting quality, ensuring compliance with energy codes and standards. Perfect for office, retail, and educational environments.

Features

- High Quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, and Lumen Maintenance
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Polycarbonate
- Multi CCT: Selectable Multi-CCT & Power Switches Inside The Driver Box

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 42W/50W
- Power Factor: >0.92
- Efficacy: 115 LPW

Mechanical:

- High Quality LED Chips Provide High Efficiency, Heat Dissipation, Stability, And Lumen Maintenance
- Individual, Pure Aluminum Heat Sinks Offers Heat Transmission Faster Than Die Cast Steel
- Driver Disconnect provided Where Required to Comply With US And Canadian Codes
- Performance Engineered Optical Lens Assembly Delivers Unique Beam Angles and Reduces Glare
- Polycarbonate Lens
- Operating Temp: -22°F to 104°F

Lighting:

- Dimmable: 0~10V Dimming
- Multi CCT: Selectable Multi-CCT & Power Switches Inside The Driver Box
- Total Lumens: 4830LM/5750LM
- Color Temperatures: 3500K/4000K/5000K
- Inside The Driver Box
- Color Rendering Index: CRI ≥ 80
- IP Rating: IP20 Indoor use only

Applications:



- Retail/Schools/Offices
- Healthcare/Conference rooms
- Hospitality/Corridors
- Reception areas/Foyer
- Library




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatetmfg.com |



Photometrics: LTRW-2X4-MCTP4




BUG Rating: B2-U3-G2

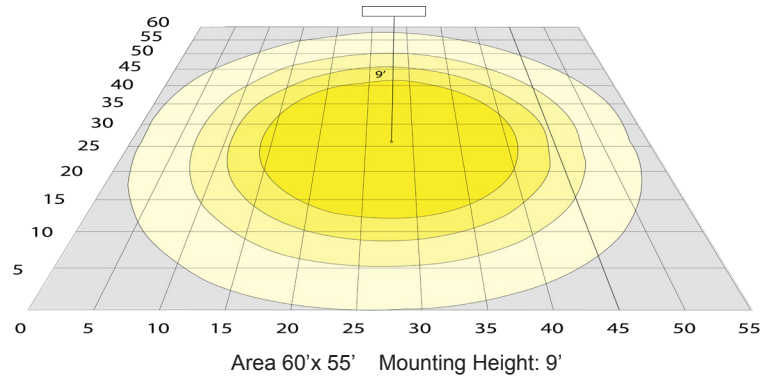

Other Views:



Side View

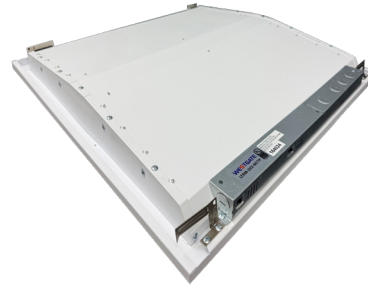

Back View

Performance Table: LTRW-2X4-MCTP4

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LTRW-2X4-MCTP4	42W 50W	120~277V	4830LM 5750LM	3500K 4000K 5000K	B2-U3-G2	115

Sample Ordering

Model Size Color Temp./Watts

LTRW - 2X4 - MCTP4


Accessories:

Blank = No Option For Accessories
LPNG-SRFC-2X4 = SURFACE MOUNTING KIT

Factory-Installed Options:

Blank = No Option For Accessories
OPT-EM-LTRW= EXTERNAL EMERGENCY BACKUP BATTERY MOUNTED ON TOP
OPT-SEN-2MRD-36= PROGRAMMABLE MICROWAVE BI-LEVEL SENSOR
WEC-3RC= OPTIONAL REMOTE CONTROL
OPT-FWH-63= 6FT 3-WIRE WHIP
OPT-FWH-65= 6FT 5-WIRE WHIP
OPT-FWH-66= 6FT 6-WIRE WHIP

ACCESSORIES and MOUNTING KIT:

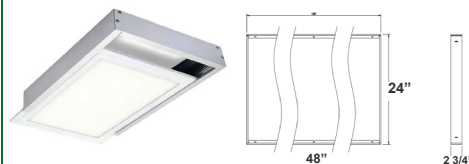

LPNG-SRFC-2X4

FACTORY-INSTALLED OPTIONS:



OPT-EM-LTRW



OPT-SEN-2MDR-36



OPT-FWH-63
OPT-FWH-65
OPT-FWH-66



WEC-3RC

