
LVC SERIES Indoor Lighting

LVC-36-MCT5-BN

36" MULTI-CCT VANITY LIGHTS





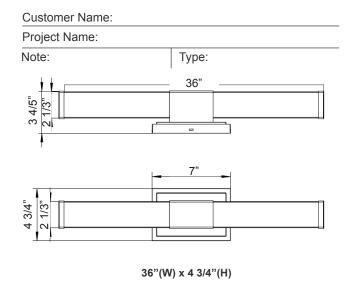



This is LED Vanity Model Ideal for office, Retail Store, Showroom, Residential applications and Damp environment lighting applications.

Features

- Corrosion and Heat Resistance Powder Coated
- · Finish: Brushed Nickel
- Durable Die-cast Aluminum

- Lens Type: Polycarbonate Lens
- MCT: Multi Color Temperature (Selectable Switch Inside Fixture)

Technical Specifications

Electrical:

Voltage: 120V AC 50/60Hz

Wattage: 24W

Power Factor: >0.95

Total Harmonic Distortion: ≤ 20 %

Efficacy: 70 LPW

Mechanical:

- Corrosion and Heat Resistance Powder Coated
- Finish: Brushed Nickel
- Durable Die-cast Aluminum
- Lens Type: Polycarbonate Lens
- Suitable for Damp Location
- Operating Temperature: -22°F to 104°F

Lighting:

- Dimming: TRIAC Dimming (Dimmable Down to 5% Compatible with Traic and ELV Dimmers)
- Total Lumens: 1680LM
- Color Temperatures: 2700K/ 3000K/3500K/4000K/5000K
- Multi-CCT(Selectable Switch Inside Fixture)
- Color Rendering Index: CRI ≥ 90
- 50,000 Hours Rated Life
- 5-Year Warranty
- Beam Angle: 104.8°(H) x 100.5°(V)

Applications:

 Ideal for Office, Retail Store, Showroom, Residential Applications and Damp Environment Lighting Applications

Other Models:

• 16W | 1120LM | LVC-24-MCT5-BN















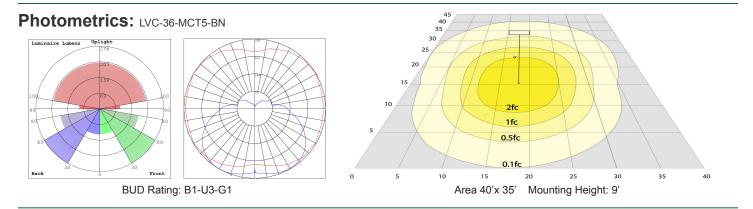

Other Views:



Performance Table: LVC-36-MCT5-BN

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
LVC-36-MCT5-BN	24W	120V	1680LM	2700K 3000K 3500K 4000K 5000K	B1-U3-G1	70

Sample Ordering

Model		Size	Color Temp.	Housing
	LVC	36	– MCT5 –	BN

Example:

1. LVC-36-MCT5-BN

(For LVC 24W MCT5 fixture 120V)

Other Model: LVC-24-MCT5-BN

