

POB SERIES Commercial Lighting


POB-HB-3FT-56W
PATIENT OVERBED HEALTHCARE LIGHT WITH PULL CHAIN AND INDICATOR LIGHT

WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!

Customer Name: _____
Project Name: _____
Note: _____ | Type: _____



The Patient Overbed Healthcare Light from Westgate Mfg offers soft, glare-free illumination with an easy-to-use pull chain for patient control and an integrated indicator light for operational status. Designed for energy efficiency and durability, it ensures long-lasting performance and reduced costs. Ideal for hospitals, nursing homes, and assisted living facilities, this light enhances patient care and satisfaction.

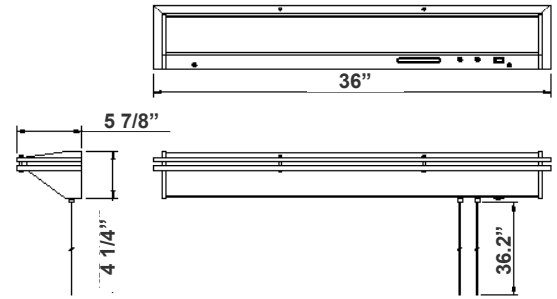

4 1/4"(H) x 36"(W) x 5 7/8"(D)

Features

- LED Strip Lights
- 5-Year Warranty
- 50,000 Hours Rated Life
- Lens: Frosted Diffuse Polycarbonate Lens

Technical Specifications

Electrical:

- Voltage: 120-277VAC 50/60Hz
- Wattage: 20W UP Light, 35W, Down Light, 1W Night Light
- Power Factor: >0.9
- Efficacy: 50 LPW

Lighting:

- Total Lumens: 2800LM
- Color Temperatures: 2700K/3000K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 120°
- 50,000 Hours Rated Life

Mechanical:


- White Finish
- Housing: Heavy Die-Formed Steel, White Powder Coated
- Lens Snaps Into The Tabs Of The Housing Fixture
- Mounting: Surface Mount, Wall Mount
- Operating Temperature: -4°F -113°F
- Suitable For Damp Location
- 5-Year Warranty

Applications:

- Hospitals
- Nursing homes
- Assisted living facilities
- Rehabilitation centers
- Hospice care facilities

Pull Chain Steps



- #1
• On/Off The Night Light
- #2
• 1- Up light
• 2- Downlight
• 3- Up/down on
• 4- Off




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgatemfg.com



Photometrics: POB-HB-3FT-56W

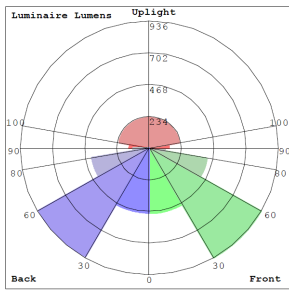

BUD Rating: B1-U3-G2

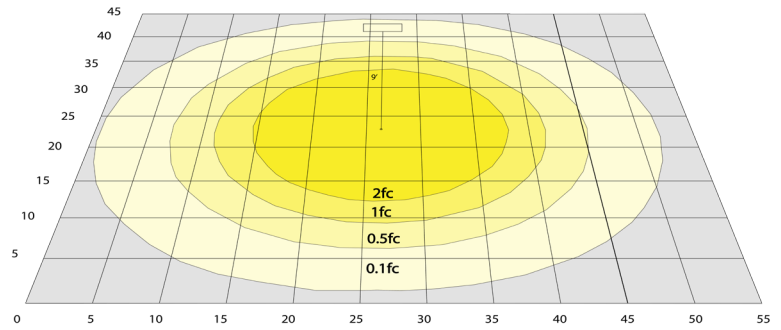

60W 5000K, Area 45'x 55' Mounting Height: 9'

Other Views:



Side View



Front View

Performance Table: POB-HB-3FT-56W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
POB-HB-3FT-56W	20W UP 35W DOWN	120~277V	5000LM	2700K 3000K 4000K	B1-U3-G2	50

Sample Ordering

Model Model Size Wattage

POB - HB - 3FT - 56W

Factory-Installed Options:

Blank = No Option For Accessories

OPT-HBC-125TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 125V, WHITE

OPT-HBC-277TL-WH = NEMA TWIST-LOCK PLUG 8FT, 15A, 277V, WHITE

OPT-HBC-125SB-WH = STRAIGHT BLADE PLUG 10FT, 15A,125V, 3-CONDUCTOR 18AWG,WHITE

FACTORY-INSTALLED OPTIONS:



OPT-HBC-125SB-WH



OPT-HBC-125TL-WH



OPT-HBC-277TL-WH

