

SFL SERIES Commercial Lighting

SFL-4FT-60W-MCTP

POWER & CCT- ADJUSTABLE LED SUSPENDED FRAME FIXTURES,
MCTP Multi Color Temperature & Multi Power/Wattage (Selectable)


WESTGATE
THE FUTURE IS HERE...AND IT'S QUITE BRIGHT!



Selection:



Customer Name: _____
Project Name: _____
Note: _____ | Type: _____

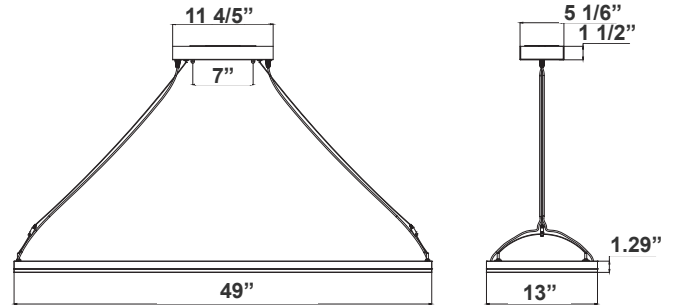

Canopy Dimension:
11 4/5"(L) x x 1 1/2"(D) x 5 1/6"(W)

A modern decorative Euro-design suspended light suitable for conference tables, creative offices and department stores.

Features

- LED Superior Architectural Lights
- Opal Polycarbonate Tube Lens - Direct Down Light
- Pendant Mounted
- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- 5-Year Warranty
- Aluminum Housing With Sandy White Finish

Technical Specifications

Electrical:

- Voltage: 120-277V AC 50/60Hz
- Wattage: 40W/50W/60W
- Power Factor: >0.95
- Total Harmonic Distortion: ≤19 %
- LPW: 116LM/W

Mechanical:

- Aluminum Housing With Sandy White Finish
- Two 10FT Adjustable Suspension Cables
- Pendant Mounted
- White Painted Parts Are Treated With A Five-Stage Phosphate Bonding Process And Finished With High Reflectance Baked Enamel
- Opal Polycarbonate Tube Lens - Direct Down Light
- Operating Temperature: -22°F to +104°F
- IP Rating: IP20, Suitable For Damp Location
- 5-Year Warranty

Lighting:

- MCTP: Multi Color Temperature and Power (Selectable, The Switches Are Inside The Canopy)
- Dimmable: 0~10V Dimming
- Total Lumens: 7000LM
- Color Temperatures: 3000K/3500K/4000K
- Color Rendering Index: CRI ≥ 80
- Beam Angle: 115°(H) x 109.6°(V)
- 50,000 Hours Rated Life

Applications:

- Ideal for offices, Hotels, Corridors, Saloons, Libraries, Meeting Rooms, Conference Halls, And The Best Solution For Modern Lighting Solutions
- It Can Be Ssed In Sny Indoor Applications

Other Models:



- 60W | 7000LM | SFL-4FT-60W-MCTP-BK • 60W | 7000LM | SFL-4FT-60W-MCTP-GD




Phone: (877) 805-2252 | Fax: (877) 805-2252
www.westgateimg.com



Photometrics: SFL-4FT-60W-MCTP

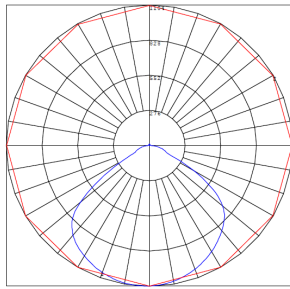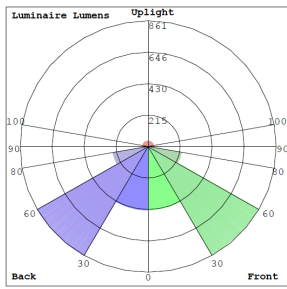

BUD Rating: B1-U2-G1

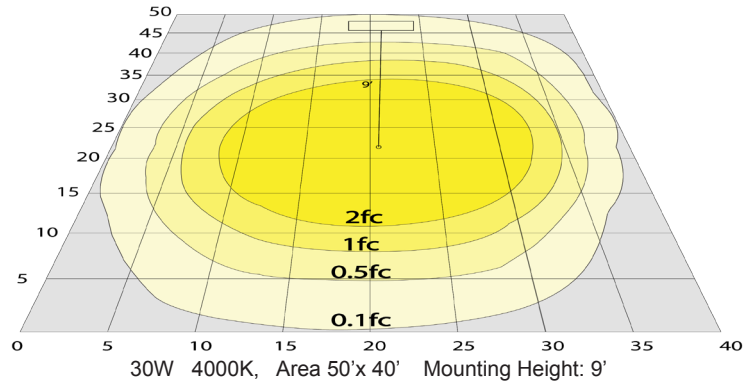

Other Views:



Side View



Front View



Back View

Performance Table: SFL-4FT-60W-MCTP

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
SFL-4FT-60W-MCTP	40W	120~277V	4640	3000K 3500K 4000K	B1-U2-G1	116
	50W		5800			
	60W		7000			

Sample Ordering

Model Size Wattage Color Temp.

SFL - 4FT - 60W - MCTP

Factory-Installed Options:

Blank = No Option For Accessories

OPT-EM-SL1INT = EMERGENCY BACKUP INTERNAL BATTERY

OPT-SEN-2US= ULTRASONIC BI-LEVEL DIMMING

FACTORY-INSTALLED OPTIONS:



OPT-SEN-2US



OPT-EM-SL1INT

