



Junction box 1" thick included with fixture

SSL4-27K SSL4-30K
 SSL4-40K SSL4-50K

LED ULTRA SLIM RECESSED LIGHTS

Ideal for New as well as old residential and commercial constructions.

ELECTRICAL SPECIFICATIONS:

- Voltage: 120VAC
- Wattage: 9W
- Power factor: >0.90
- Efficacy: 70LM/W,72LM/W

HOUSING SPECIFICATIONS:


- 1/4" Thick
- Die-cast Aluminum with white powder coat finish
- Pot light housing is not required even for insulated ceiling
- Junction box 1" thick included with fixture
- Type IC rated: Approved for direct contact with insulation
- Operating temperature: -40°F ~ 104°F
- Lifespan: 50,000 Hrs.
- Air-tight and damp location approved

CERTIFICATIONS: ETL,ES



DIMENSIONS:

1/4"(Thick)

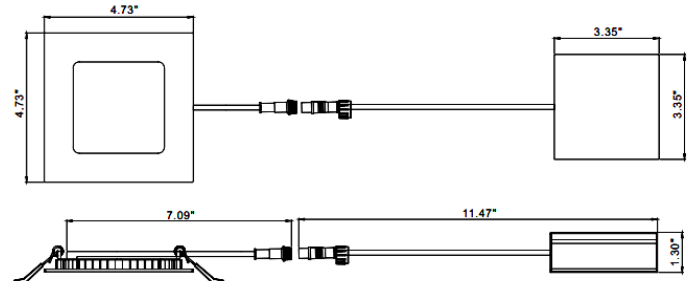

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|----------|-------|---------|--------|------------|
| SSL4-27K | 9W | 120VAC | 630LM | 2700K |
| SSL4-30 | 9W | 120VAC | 630LM | 3000K |
| SSL4-40K | 9W | 120VAC | 650LM | 4000K |
| SSL4-50K | 9W | 120VAC | 650LM | 5000K |

LIGHTING SPECIFICATIONS:

- Dimming: dimmable
- Lens: 0.125" white translucent acrylic
- Optics: White translucent acrylic
- LED: Seoul DOB (Driver On Board) Technology
- Total lumens: 630LM/650LM
- Color temperature: 2700K/3000K/4000K/5000K
- Color rendering index: >80
- Beam Angle: 100° -110°

WARRANTY: 5 years



JOB NAME: _____

DATE: _____

SSL4-27K SSL4-30K
SSL4-40K SSL4-50K

LED ULTRA SLIM RECESSED LIGHTS

BRAND OF DIMMERS:

| MODEL | WATTS | VOLTAGE | LUMENS | COLOR TEMP |
|----------|-------|---------|--------|------------|
| SSL4-27K | 9W | 120VAC | 630LM | 2700K |
| SSL4-30 | 9W | 120VAC | 630LM | 3000K |
| SSL4-40K | 9W | 120VAC | 650LM | 4000K |
| SSL4-50K | 9W | 120VAC | 650LM | 5000K |

| NO. | BRAND | MODEL |
|-----|----------------|----------------|
| 1 | Leviton | 6631-1LT |
| 2 | Lutron | MACL-153MLH-AL |
| 3 | Lutron | TGCL-153PH-LA |
| 4 | Lutron | DVW-603PGH-WH |
| 5 | Lutron | CT-600PR-WH |
| 6 | Lutron | LGCL-153PHL-IV |
| 7 | Lutron | TGCL-153PH-LA |
| 8 | Lutron | LSLV603PWV |
| 9 | Leviton | 6674-POW |
| 10 | Lutron | DVCL-153P |
| 11 | Lutron | MSCL-OP153P |
| 12 | Lutron | CTCL-153P |
| 13 | Lutron | MACL-153M |
| 14 | Pass & Seymour | HCL453PTCCCV6 |
| 15 | Pass & Seymour | LSLV603PWV |

