

5. Display Cases – refrigerated

for serve-over




Snack-Counter Special Size

Made to your measurement instructions

Preferred application:
Refrigerated display case for cooling cream cakes, cakes and snacks.



5
Serve-Over
Display Cases

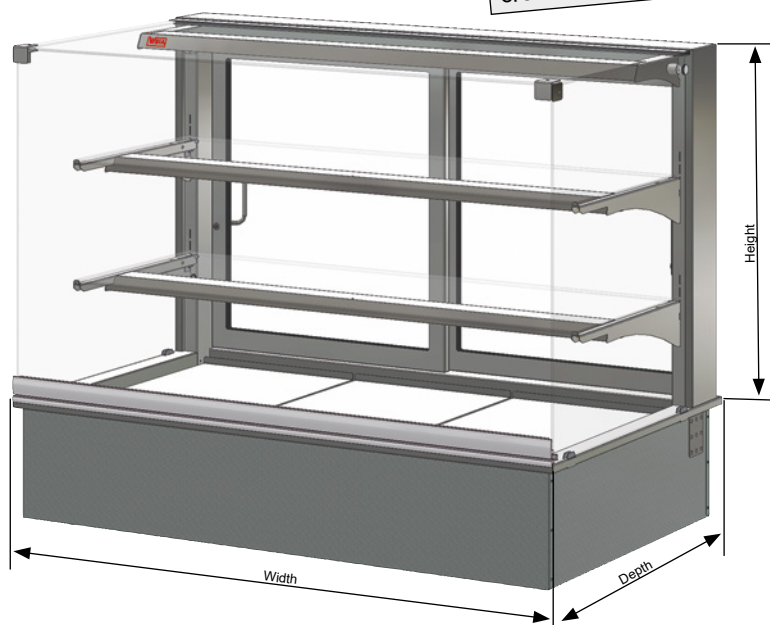

Made to your measurement instructions!

- **Width, depth and height can be chosen**, so this display case can be placed, where standard sizes do not fit.
- **Smooth-running sliding doors with rollers**, easily removable for cleaning.
- **Longer operating life of the cooling unit (LONG-LIFE)**
- **Also suitable for small counter constructions**, because production is already possible from a depth of 500 mm.
- **Variable presentation**
by means of continuously height adjustable glass shelves, which can be set straight or inclined towards the customer.
- **Optionally, with wing door, double wing doors or sliding doors**
- **Front glass pane can be swung outwards for cleaning**
- **Toughened safety glass**
- **Easy cleaning of the interior area**
by swing-out front glass pane and removable sliding doors.
- **Easy cleaning of the evaporator area**
by liftable evaporator – self-locking per gas pressure springs.

This display case is custom-made manufactured according to your measurement instructions. Therefore, this display case can also be used where standard sizes do not fit.

The design is freely selectable. The display case is available optionally with wing door, double wing doors or ball bearing, smooth-running sliding doors. The number of intermediate glass shelves is individually selectable.

Snack-Counter Special Size		Art.-No. 12091
Possible display case dimensions:		
Depth (of the display case):	Width (of the display case): *	Height:
500 mm – 680 mm	800 mm – 2600 mm	300 mm – 710 mm
681 mm – 800 mm	600 mm – 2600 mm	300 mm – 710 mm

Price available on request.

* From a width of 1600 mm: two-piece front glass and upper glass.

For a quotation following information is required:

- Width
- Depth
- Height
- Number of glass shelves
- Design of the doors: wing door right/left; sliding doors; double wing doors

Description

Custom-made refrigerated display case with circulating air for cooling cream cakes, cakes and snacks. On the customer side with angular glass construction made of toughened safety glass. The glass shelves are height adjustable and can be set at an angle, which means better presentation. Temperature: < 7°C at 25°C/60% relative humidity (climate class 3 according to DIN EN ISO 23953).

Commercial product for the installation in stationary food and service counter.

Special Accessories

Drain fitting 1 1/4" for connecting to the customer's drain
Condensate pan, loose

Art.-No.

3815

3819

Price label rail glass shelf, special length
Price label rail lower display area

11545

11546

Design

Construction, merchandise display, interior pan and exterior are made entirely of stainless steel, material 1.4301. Pan interior is finished with 1 1/4" flush threaded drain fitting and hygienic corners that are easy to clean.

The insulation is CFC-free. The exterior is made of galvanised sheet steel.

Inside the pan is a generously sized circulating air evaporator with coated surface and quiet low-voltage ventilators (12 V DC) for air circulation. Located above the circulating air evaporator are merchandise displays made of ground stainless steel material 1.4301.

To clean the pan bottom, the merchandise displays can be removed. Afterwards, the circulating air evaporator and the ventilators can be folded upwards and locked in the top position via gas pressure springs.

On the customer side, on the sides and on top with a glass construction made of toughened safety glass. The front glass pane on the customer side is mounted in a lower tilting glass holder.

The width, depth, height, the number of glass shelves and the design of the doors (wing door left/right, sliding doors, double wing doors) of the Snack-Counter Special Size are custom-made designed according to the confirmed specifications.

The sliding doors of this display case are equipped with smooth-running and ball bearing mounted rollers.

All upper glass shelves are made of safety glass. For good illumination, a protected LED light (standard colour: white) is mounted above each shelf. The glass shelves are height adjustable several times and can be set at an angle, which means better presentation.

The cooling pan can be easily mounted in the counter recess because of the circumferential mounting lip.

A digital defrosting and temperature controller is mounted beneath the cooling pan. Two air speeds can be selected for different foods. The flat control panel (installation depth: approx. 20 mm) can be removed for mounting in the counter front (cable length: approx. 1 m).

With WIHA-LONG-LIFE for a longer operating life of the cooling unit.

For external cooling unit

Delivery includes:

- Expansion valve for R134a/R513A
- Defrost and temperature controller

For ready-to-use cooling unit

The cooling unit is fully pre-assembled and is connected to the cooling pan with refrigerant couplings.

The counter design should include a well-ventilated base unit beneath the cooling pan.

Made to your measurement instructions:



5
Serve-Over
Display Cases

